

Datasheet

Cochlear™ Baha® 6 Max Sound Processor

Cochlear Baha Connect System*

Powered by the Xidium™ platform and the BCDrive™ II transducer, the Cochlear™ Baha® 6 Max Sound Processor is a premium-power bone conduction device. It provides output power for a fitting range of up to a 55 dB SNHL and is indicated for patients with conductive hearing loss, mixed hearing loss and single-sided sensorineural deafness (SSD).

Features

General	
Dual microphones	✓
Visual indicator (LED)	✓
Tamper resistant battery door ¹	✓
On device button to change programs	✓
BCDrive II – Symmetrical electromagnetic transducer	✓
SmartSound® IQ signal processing	
Directionality	✓
Bilateral directionality	✓
Impulse noise reduction	✓
Noise management	✓
Wind noise reduction	✓
Feedback management	✓
Active gain	✓
Connectivity	
Direct streaming with Apple (MFi) & Android™ (ASHA) devices ²	✓
iOS & Android app ²	✓
Remote Firmware upgrade through app	✓
Ready for Bluetooth® LE Audio ³	✓
True Wireless™ devices compatibility	
Cochlear Wireless Mini Microphone 2+ ⁴	✓
Cochlear Baha Remote Control 2	✓
Cochlear Wireless TV Streamer	✓
Cochlear Wireless Phone Clip	✓



Mint
P1668394



Black
P1668390



Copper
P1668393



Silver
P1668391



Blonde
P1668389



Brown
P1668392

Cochlear Baha 6 Max Sound Processor, 2mm:
P1809177 Blonde, **P1809178** Black, **P1809179** Silver,
P1809180 Brown, **P1809221** Copper, **P1809222** Mint

1. Ordered as separate item
2. The Cochlear Baha 6 Max Sound Processor is compatible with Apple and Android devices. The Cochlear Baha Smart App is available on App Store and Google Play. For compatibility information visit www.cochlear.com/compatibility
3. The Cochlear Baha 6 Max Sound Processor is compatible with Bluetooth LE Audio. For more information on Bluetooth LE Audio, visit www.bluetooth.com
4. Also compatible with Cochlear Wireless Mini Microphone and Cochlear Wireless Mini Microphone 2



Technical data

General	
Weight, excluding battery	11.5 g
Size	26 mm × 19mm × 12 mm
Processing delay	< 6 ms
Battery type	312 (PR 41, Zinc-Air)
Average battery life time ¹	Typically 44 - 132 hours
IP classification	IP68 ²
Measurements according to IEC60118-9 2019 2nd Ed.	
Output vibratory force level (re. 1 µN) (90 dB SPL input, FOG)	Max 121 dB HFA 113 dB
Acousto-mechanical sensitivity level (re. 1 µN / 20 µPa) (50 dB SPL input, FOG)	Max 47 dB HFA 41 dB
Reference test acousto-mechanical sensitivity level (re. 1 µN / 20 µPa) (60 dB SPL input, RTS)	HFA 34 dB
Frequency range	200 - 9700 Hz
Equivalent input noise	< 24 dB SPL
Battery current (65 dB SPL input at 1 kHz)	1.45 mA
Total Harmonic Distortion	
70 dB SPL input at 500 Hz	< 3%
70 dB SPL input at 800 Hz	< 0.3%
65 dB SPL input at 1600 Hz	< 0.3%
60 dB SPL input at 3200 Hz	< 0.3%

FOG = Full On Gain, RTS = Reference Test Gain (FOG minus 7 dB), HFA = High Frequency Average, SPL = Sound Pressure Level re. 20 µPa

1. Dependent on streaming, sound environment and gain settings
2. The Cochlear Baha 6 Max Sound Processor, with battery compartment excluded, is dust and water resistant to level IP68 of the International Standard IEC60529. Refer to the relevant user guide for more information.

This material is intended for health professionals. If you are a consumer, please seek advice from your health professional about treatments for hearing loss. Outcomes may vary, and your health professional will advise you about the factors which could affect your outcome. Always read the instructions for use. Not all products are available in all countries. Please contact your local Cochlear representative for product information.

The Cochlear Baha Smart App is available on App Store and Google Play. For compatibility information, visit www.cochlear.com/compatibility.

Cochlear, Baha, 科利耳, コクレア, 코클리어, Hear now. And always, SmartSound, the elliptical logo, and marks bearing an ® or ™ symbol, are either trademarks or registered trademarks of Cochlear Bone Anchored Solutions AB or Cochlear Limited (unless otherwise noted).

Android is a trademark of Google LLC.


Apple, the Apple logo, iPhone, iPad and iPod are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Cochlear Limited is under license.

© Cochlear Bone Anchored Solutions AB 2021. All rights reserved. 2021-01


D1760797-V2

Fitting range

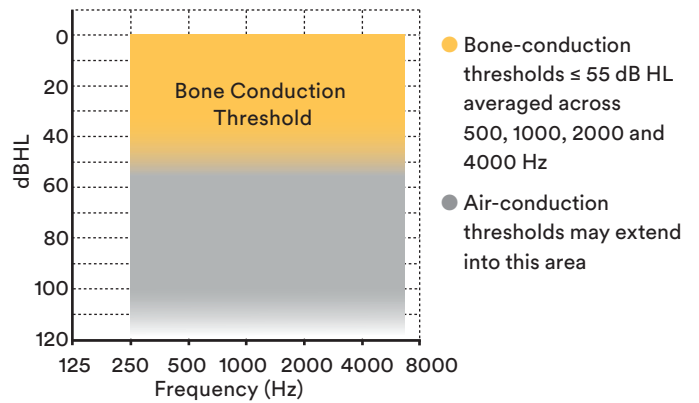



Measured on skull simulator TU-1000

Output vibratory force level frequency responses

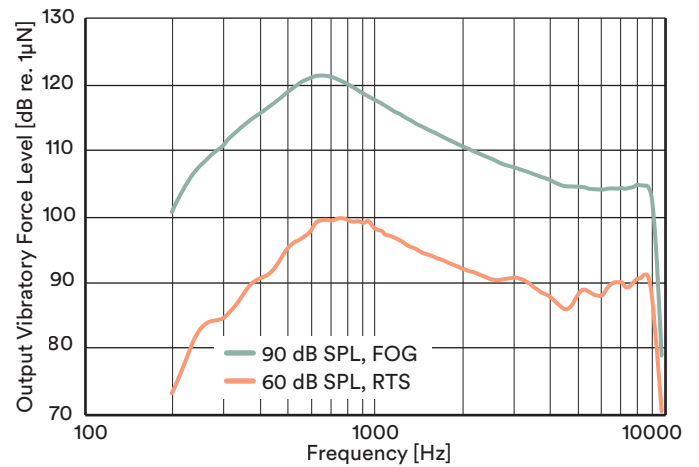

Acousto-mechanical sensitivity level frequency response

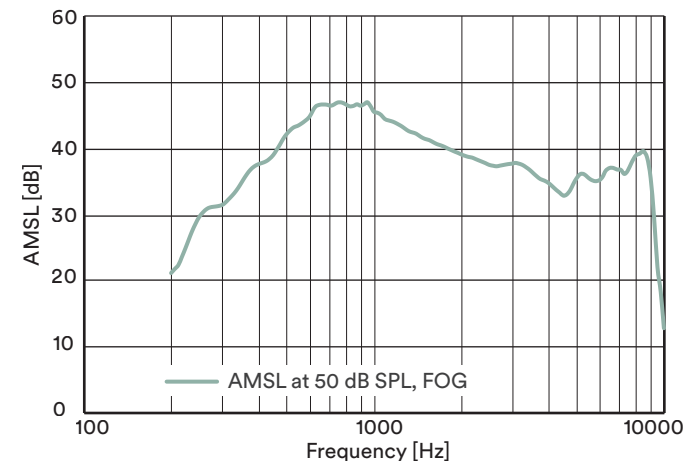

 Cochlear Bone Anchored Solutions AB, Konstruktionsvägen 14, 435 33 Mölnlycke, Sweden
Tel: +46 31 792 44 00, Fax: +46 31 792 46 95

Regional Offices

Cochlear Ltd. (ABN 96 002 618 073), 1 University Avenue, Macquarie University, NSW 2109 Australia
Tel: +61 2 9428 6555, Fax: +61 2 9428 6352

Cochlear Americas, 10350 Park Meadows Drive, Lone Tree, CO 80124, USA
Tel: +1 303 790 9010, Fax: +1 303 792 9025

Cochlear AG, EMEA Headquarters, Peter Merian-Weg 4, 4052 Basel, Switzerland
Tel: +41 61 205 8204, Fax: +41 61 205 8205

Cochlear Latinoamérica, S. A., International Business Park Building 3835, Office 403 Panama Pacifico, Panama
Tel: +507 830 6220, Fax: +507 830 6218

www.cochlear.com